
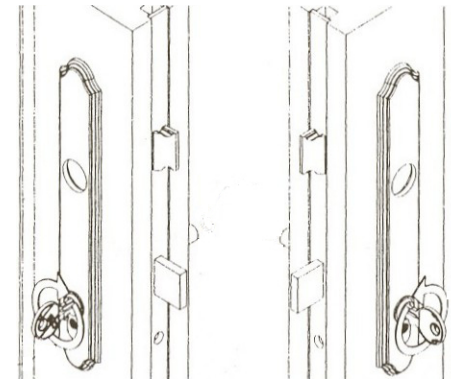


Installation Instructions 90 Degree Turn Cylinder

1. Push the tab (A) switch downward to unlock the drive tab (C).
2. Rotate knob (B) until the drive tab (C) is aligned with the cylinder (D).
3. Holding the drive tab (C) in this position, insert the cylinder body into the interior faceplate so the key plug from the cylinder protrudes through the outer faceplate.
4. Once the cylinder body is in the correct position, rotate the knob (B) to disengage the tab (A). Test the installation by rotating the knob (B) or using the key to extend and retract the deadbolt.
5. Fix cylinder body in place with the cylinder screw.

TO REMOVE CYLINDER: Loosen and remove cylinder screw and repeat steps 1-4 above.

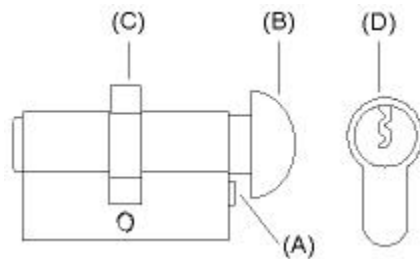

Revision A